

Wall Hoods

Impress - Wall Hoods

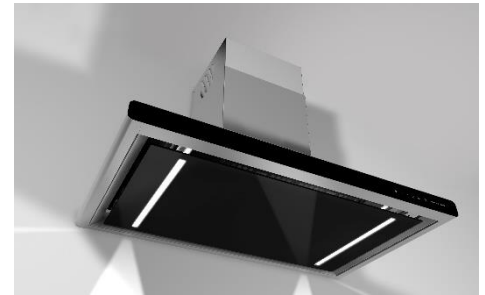

Impress

Size (mm)	Finishing	Num. of filters	Num. of Leds	Motor	Recirculation	Reference
900 x 520	Stainless Steel	2	2	VF700	Optional	26195

Please find all motor details on page 48



FSA



Last-time



LED



TouchControl




AISI 304 - 1,2.

VF/GP-Silence+

Impress

Outlet 150 mm.

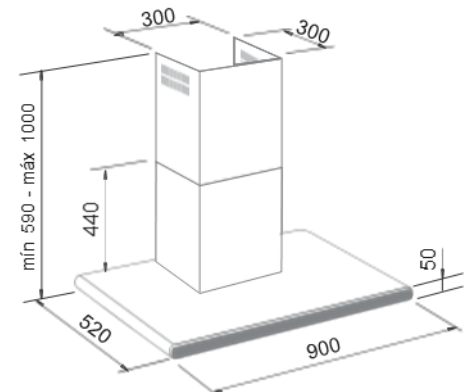

Technical information

- Finishing stainless steel AISI 304 of 1,2 mm. & glass.
- Motors VF & EBM GP Silent PLUS.
- Isolated motor box with sound absorbing coating.
- 3 speeds + booster.
- Touch control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting stripe (5W/meter - 2700K).
- Perimetral aspiration.
- Aluminium filters.

Optional accessories

Optional accessories	Reference
Recirculation kit	90133
AirSoft 1 silencer ducting Ø150	90182

Other available Motors

IN1100GP
Inline
26196

Mercury - Wall Hoods



B.A.System (balanced aspiration).



Mercury

Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Reference
900 x 520	Stainless steel	3	1	VF700	Optional	26229
1000 x 520	Stainless steel	3	1	VF700	Optional	26233
1200 x 520	Stainless steel	4	1	VF700	Optional	26237
1350 x 520	Stainless steel	5	1	VF700	Optional	26241

Other available Motors (see page 49)

IN1100GP Inline	PA1200 Ext. Wall	TJ1900 Roof
26230	26231	26232
26234	26235	26236
26238	26239	26240
26242	26243	26244

Please find all motor details on page 48



FSA



Last-time



LED



Electronic C.



Easy clean



Temp-Term



Custom Made



AISI 304 - 1mm.



VF/GP-Silence+



S/S Filters HC



BA system




A

Technical information

- Finishing stainless steel AISI 304 - 1mm.
- Motors VF & EBM GP Silent PLUS.
- 3 speeds + booster.
- Easy clean panel.
- Isolated motor box with sound absorbing coating.
- B.A.System (balanced aspiration).
- Electronic Control.
- Timer and thermometer.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting stripe (5W/meter - 2700K).
- High Class stainless steel filters.

Mercury



Outlet 150 mm.

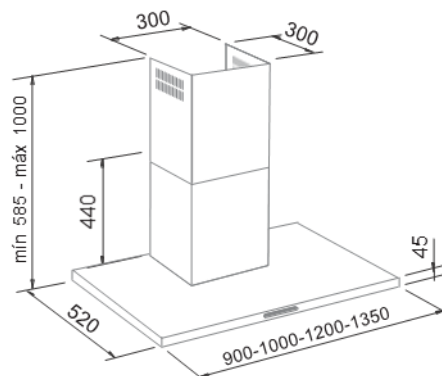

Optional accessories

Optional accessories	Reference
Recirculation kit	90133
AirSoft 1 silencer ducting Ø150	90182
<i>Available Custom made</i>	
<i>Stainless steel chimney extensions</i>	

Quasar - Wall Hoods

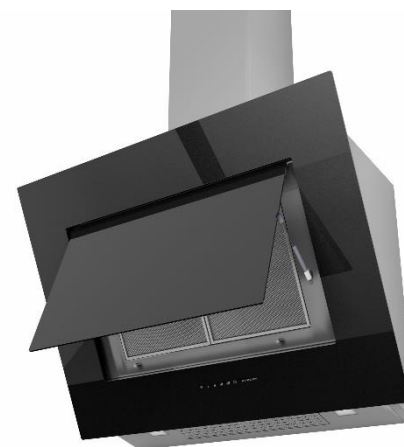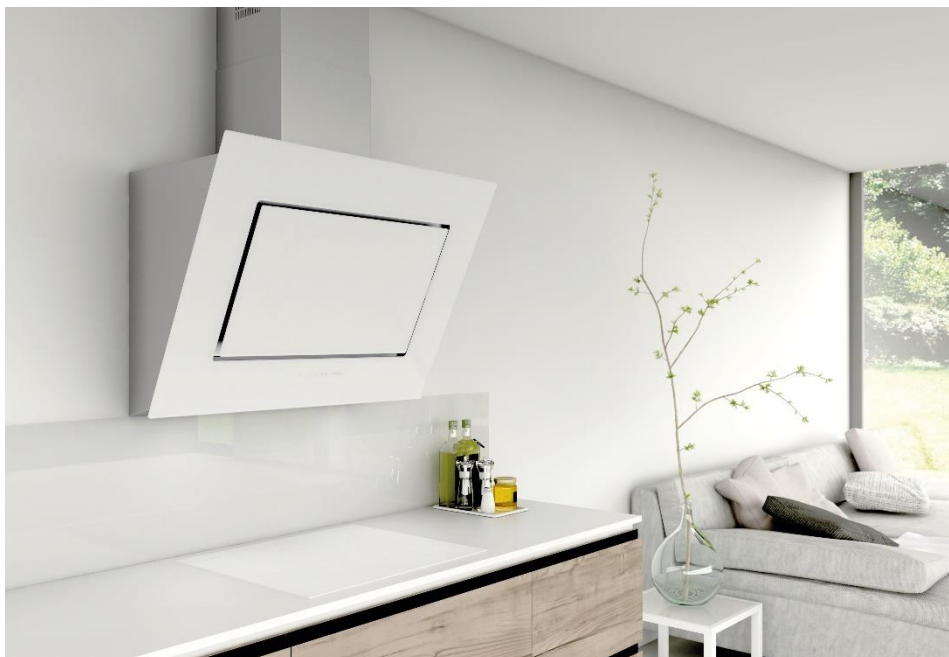

Double aspiration system SDA



Quasar Standard Model

Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Reference
900	White Glass	2+1	2	VF700	Optional	26197
900	Black Glass	2+1	2	VF700	Optional	26202
1200	White Glass	3+1	2	VF700	Optional	26207
1200	Black Glass	3+1	2	VF700	Optional	26212

Other available Motors (see page 49)

1100GP Internal	IN1100GP Inline	PA1200 Ext. Wall	TJ1900 Roof
26198	26199	26200	26201
26203	26204	26205	26206
26208	26209	26210	26211
26213	26214	26215	26216

Please find all motor details on page 48



FSA



Last-time



LED



Easy clean



TouchControl



SDA
Double Asp.



VF/GP-Silence+

Technical information


- Finishing stainless steel and white glass or black. (RAL 9003 or 9005)
- Motors VF & EBM GP Silent PLUS.
- 3 speeds + booster.
- Hydraulic piston.
- Double aspiration system SDA.
- Easy clean panel.
- Rear ducting available
- Touch control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting (2,1W - 3000K).
- Perimetral aspiration & traditional.
- Stainless Steel (SDA) and aluminium filters.

Optional accessories

	Reference
Recirculation kit (VF versions)	90134
AirSoft 1 silencer ducting Ø150	90182
<i>Ducting and accessories</i>	
<i>Stainless steel chimney extensions</i>	

Quasar

Outlet 150 mm.

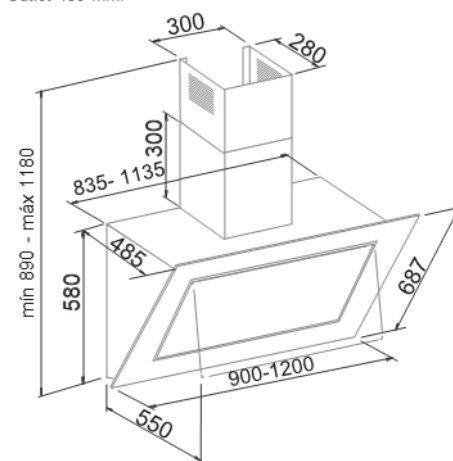

Quasar - Wall Hoods



Quasar Pure Filtering (Plasma)



Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Reference
900	White glass	2+1	2	VF600	Plasma	26355
900	Black glass	2+1	2	VF600	Plasma	26356

Please find all motor details on page 48



Technical information

- Finishing stainless steel and white glass or black. (RAL 9003 or 9005)
- Motor VF Silent PLUS.
- 3 speeds + booster.
- Hydraulic piston.
- Double aspiration system SDA.
- Easy clean panel.
- Touch control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting (2,1W - 3000K).
- Perimetral aspiration & traditional.
- Stainless Steel (SDA) and aluminium filters.
- Recirculation FPF (Freca Pure Filtering with PlasmaMade)

PlasmaMade Included



See page 12 for more details on our Pure Filtering (Plasma)

Silence Range – special order

Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Reference
900	White glass	2+1	2	S8	Optional	26012
900	Black glass	2+1	2	S8	Optional	26013
1200	White glass	3+1	2	S8	Optional	26014
1200	Black glass	3+1	2	S8	Optional	26015



See pages 10 & 11 for more details on FSR (Freca Silence Range)

Please find all motor details on page 48



Technical informations

- Finishing stainless steel & White or Black Glass. (RAL 9003 or 9005)
- AirSoft 1 silencer ducting of 45 cm.
- EBm motor S8-Silence ++ & 1100GP- Silent PLUS.
- 3 speeds + booster.
- Hydraulic piston.
- Double aspiration system SDA.
- Easy clean panel.
- Rear ducting available
- Touch control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting (2,1W - 3000K).
- Perimetral aspiration & traditional.
- Stainless Steel (SDA) and aluminium filters.

Included accessories

Airsoft 1 silencer ducting 45 cm.

Optional accessories

Ducting and accessories

Stainless steel chimney extensions

Limit - Wall Hoods




Limit

Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Reference
900 x 360	White Glass	1+1	2	VF700	Optional	26217
900 x 360	Black Glass	1+1	2	VF700	Optional	26218


Double aspiration system SDA

Limit

Outlet 150 mm.

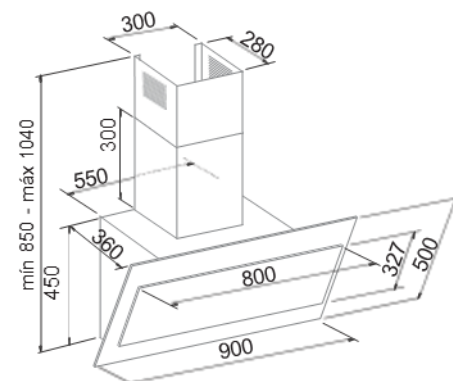

Please find all motor details on page 48




Technical information

- Finishing stainless steel and white glass or black. (RAL 9003 or 9005)
- Motors VF Silent PLUS.
- 3 speeds + booster.
- Double aspiration system SDA.
- Easy clean panel.
- Rear ducting available
- Touch control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting (2,1W - 3000K).
- Perimetral aspiration & traditional.
- Stainless Steel (SDA) and aluminium filters.

Optional accessories


Optional accessories	Reference
Recirculation kit	90134
AirSoft 1 silencer ducting Ø150	90182
<i>Ducting and accessories)</i>	
<i>Stainless steel chimney extensions</i>	

Odyssey - Wall Hoods

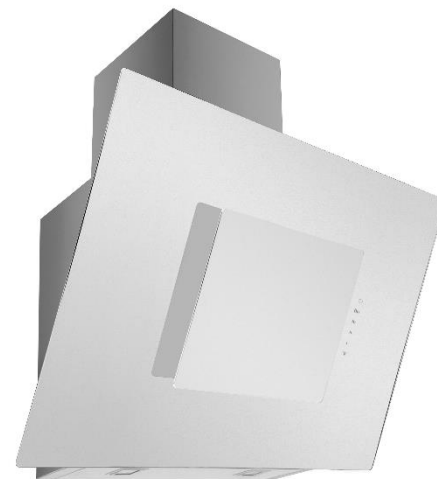

Odyssey

Outlet 150 mm.

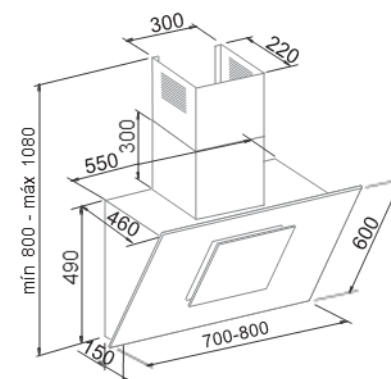

Odyssey

Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Reference
700 x 460	White Glass	1	2	VF700	Optional	26223
700 x 460	Black Glass	1	2	VF700	Optional	26224
800 x 460	White Glass	1	2	VF700	Optional	26225
800 x 460	Black Glass	1	2	VF700	Optional	26226

Please find all motor details on page 48



FSA



Last-time



LED



TouchControl



VF-Silence+

Technical information

- Finishing stainless steel and white glass or black. (RAL 9003 or 9005)
- Motor VF Silent PLUS.
- 3 speeds + booster.
- Rear ducting available
- Touch control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting (2,1W - 3000K).
- Perimetral aspiration.
- Aluminium filters

Optional accessories


	Reference
Recirculation kit	90134
AirSoft 1 silencer ducting Ø150	90182
<i>Ducting and accessories</i>	
<i>Stainless steel chimney extensions</i>	

Professional - Wall Hoods



Professional Wall

Outlet 150 mm.

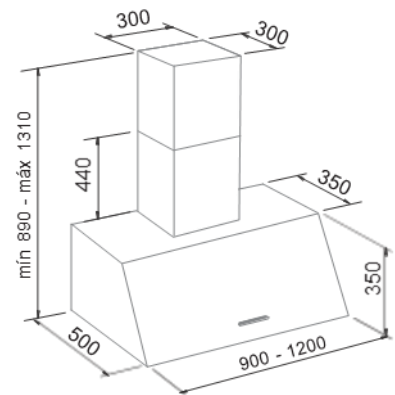

Professional

Size (mm)	Finishing	Num. of filters	Num. of LED's	Motor	Recirculation	Stainless steel
900 x 500	Stainless steel	3	2	1100GP	Not available	26330
1200 x 500	Stainless steel	4	3	1100GP	Not available	26334

Other available Motors (see page 49)

IN1100GP Inline	PA1200 Ext. Wall	TJ1900 Roof
26331	26332	26333
26335	26336	26337

Please find all motor details on page 48



FSA



Last-time



LED



S/S Filters



Temp-Term



Easy clean



Electronic C.



BA system
Bal. Asp.



1 1/2 mm
AISI 304 - 1mm.



GP-Silence+



Custom Made

A

Technical information

- Finishing stainless steel AISI 304 - 1mm.
- Motor 1100GP - Silent PLUS.
- 3 speeds + booster.
- Easy clean panel.
- B.A.System (balanced aspiration).
- Rear ducting available
- Electronic Control.
- Deferred stop (Last time).
- Filter saturation warning light.
- LED lighting (2,1W - 3000K).
- Stainless steel filters.

Optional accessories

	Reference
AirSoft 1 silencer ducting Ø150	90182
<i>Ducting and accessories</i>	
<i>Stainless steel chimney extensions</i>	